

OPUS







CONTENTS

INTRODUCTION	04 - 07
CYLINDRIC	
FEATURES	10 - 15
MODELS	18 - 33
CUBIC	
FEATURES	36 - 39
MODELS	42 - 69
TECH SPEC	72 - 75
ACCESSORIES	76 - 78
WARRANTY	79

FIRED BY DESIGN

Fire is an elemental force, a magnet drawing us to its warm soothing light. It captivates us, soothes yet stimulates, creates space for contemplation, creation, conversation and enjoyment.

Opus stoves bring this force into your home. Designed with passionate dedication, engineered for efficiency, and built with attention; a pleasure to operate, with a focus not only on providing warmth, but also as a stage for the curling flames to weave their dance. Expansive windows allow the firelight to bathe your room in the oranges, reds, and yellows as only real flames can. The wide range of models allows you to choose exactly the look and size of stove that meets your individual requirements.

Opus stoves are available through a selected network of suppliers who are there to guide, support and advise you from the initial planning right through to the completed installation.



ABOUT OPUS

Talented European designers and engineers create the overall sharp, clean and contemporary look which characterises Opus.

The team constantly work on developing innovations that make a stove which is a pleasure to use, beautiful to look at and supremely efficient. Independent European laboratories provide the figures which we publish for performance data such as efficiency and heat output.

Factory automation makes processes like metal cutting, rolling, and die cutting, safe and pinpoint accurate. Computer-aided systems help keep wastage to a minimum. ISO 9001 certified quality control helps to ensure that the stove reaches your living room as perfectly as intended.





ECODESIGN READY

Ecodesign is an EU-wide policy set to come into force for wood stoves in 2022. We always work hard to improve our stoves and many already meet the tough new criteria.

The Ecodesign scheme is intended to make stoves burn even more cleanly, improve efficiency and further reduce emissions. We see no need to wait until 2022 to improve our stoves. Many are likely to already meet the proposed criteria - just look out for the 'Ecodesign Ready' logo (as shown to the left) in the brochure.





BREADTH OF CHOICE

A broad selection of models ensures that there will be something to suit every need and taste.

Opus Cylindric are rounded and upright stoves with curved glass to match. For those that favour straight edges Opus Cubic are stunning cuboid models with generous windows.


Choices and options within each range then allow you to pick your perfect stove.

OPUS CYLINDRIC

Drawing inspiration from the long tradition of Scandinavian style upright woodburners.

This style of tall round woodburner looks great, featuring a raised firechamber with high generous windows. But that is not the reason they originally appeared: the Scandinavians had also discovered something else. By increasing the height of the fire chamber they were able to radically improve the combustion. When wood burns it gives off gases, and it is these which you see burning. By stretching the stove upwards more time is gained in which to properly mix the gases with enough oxygen so that they can fully burn, creating the fabulous flame pattern so characteristic of Opus stoves.

Opus Cylindric are a range of contemporary models which epitomise this design style. Their classic simplicity draws on a design heritage stretching back over 100 years.

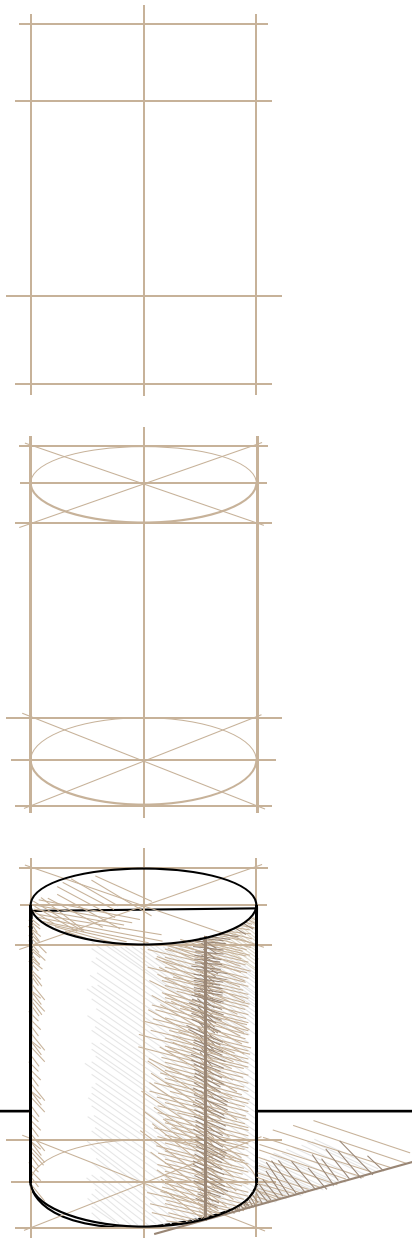

LOG STORE

Instead of a door at the bottom of the stove, log store models have an open space where you can stack logs.

Look for the letter code "LS" in the product name.



FULL GLASS DOOR

Models with full glass have a window which extends right to the edge of the door, creating a clean contemporary look.

Look for the letter code "G" in the product name.



PEDESTAL

The central pedestal enhances the feeling of space and lightness. This model can also rotate by 90° for a perfect view of the flames wherever you sit.

Look for the letter code "PR" in the product name.



FEATURES

Advances and innovations that make an Opus a pleasure to live with.

CONVECTION: FOR AN EVEN HEAT

An Opus stove has two outer layers with an air gap between them. Cool air is drawn up from the floor, heated by the body of the stove, and then released out through holes at the top. This makes for a more even spread of heat in the room and keeps the body of the stove a little cooler.

MULTI-POINT DOOR CLOSURE

Our cylindrical models all have a 2 or 3 point door mechanism, giving a positive feel and a firm closure.

DIRECT AIR: NO MORE DRAUGHTS

All Opus stoves can be connected to an external air duct. The air needed for combustion is taken from outside the house, not from the room. This reduces draughts in your home, helping to preserve valuable cosy heat.

THE ART OF COMBUSTION

Wood needs high temperatures and a precise supply of oxygen to burn. Opus stoves are designed to optimise the burning conditions in the fire chamber.

PRIMARY AIR: supplied from below the burning wood and used as a 'boost' for starting the fire, or when you have added fresh logs.


SECONDARY AIR: this preheated air flows down the inside surface of the window, feeding the fire and keeping the glass clean. Once the stove is hot you control the burn rate by adjusting this secondary air.

TERTIARY AIR: preheated air enters higher up at the back of the fire chamber through a series of holes. Look here for dancing, floating flames as the gases given off by the wood combust.

A close-up photograph of the stove's control mechanism, showing two metallic levers on a dark background. One lever is in the foreground, angled towards the viewer, while the other is partially visible behind it.

INTUITIVE AND SIMPLE CONTROLS

Two easy to use levers give you full control of the burn rate of your stove.

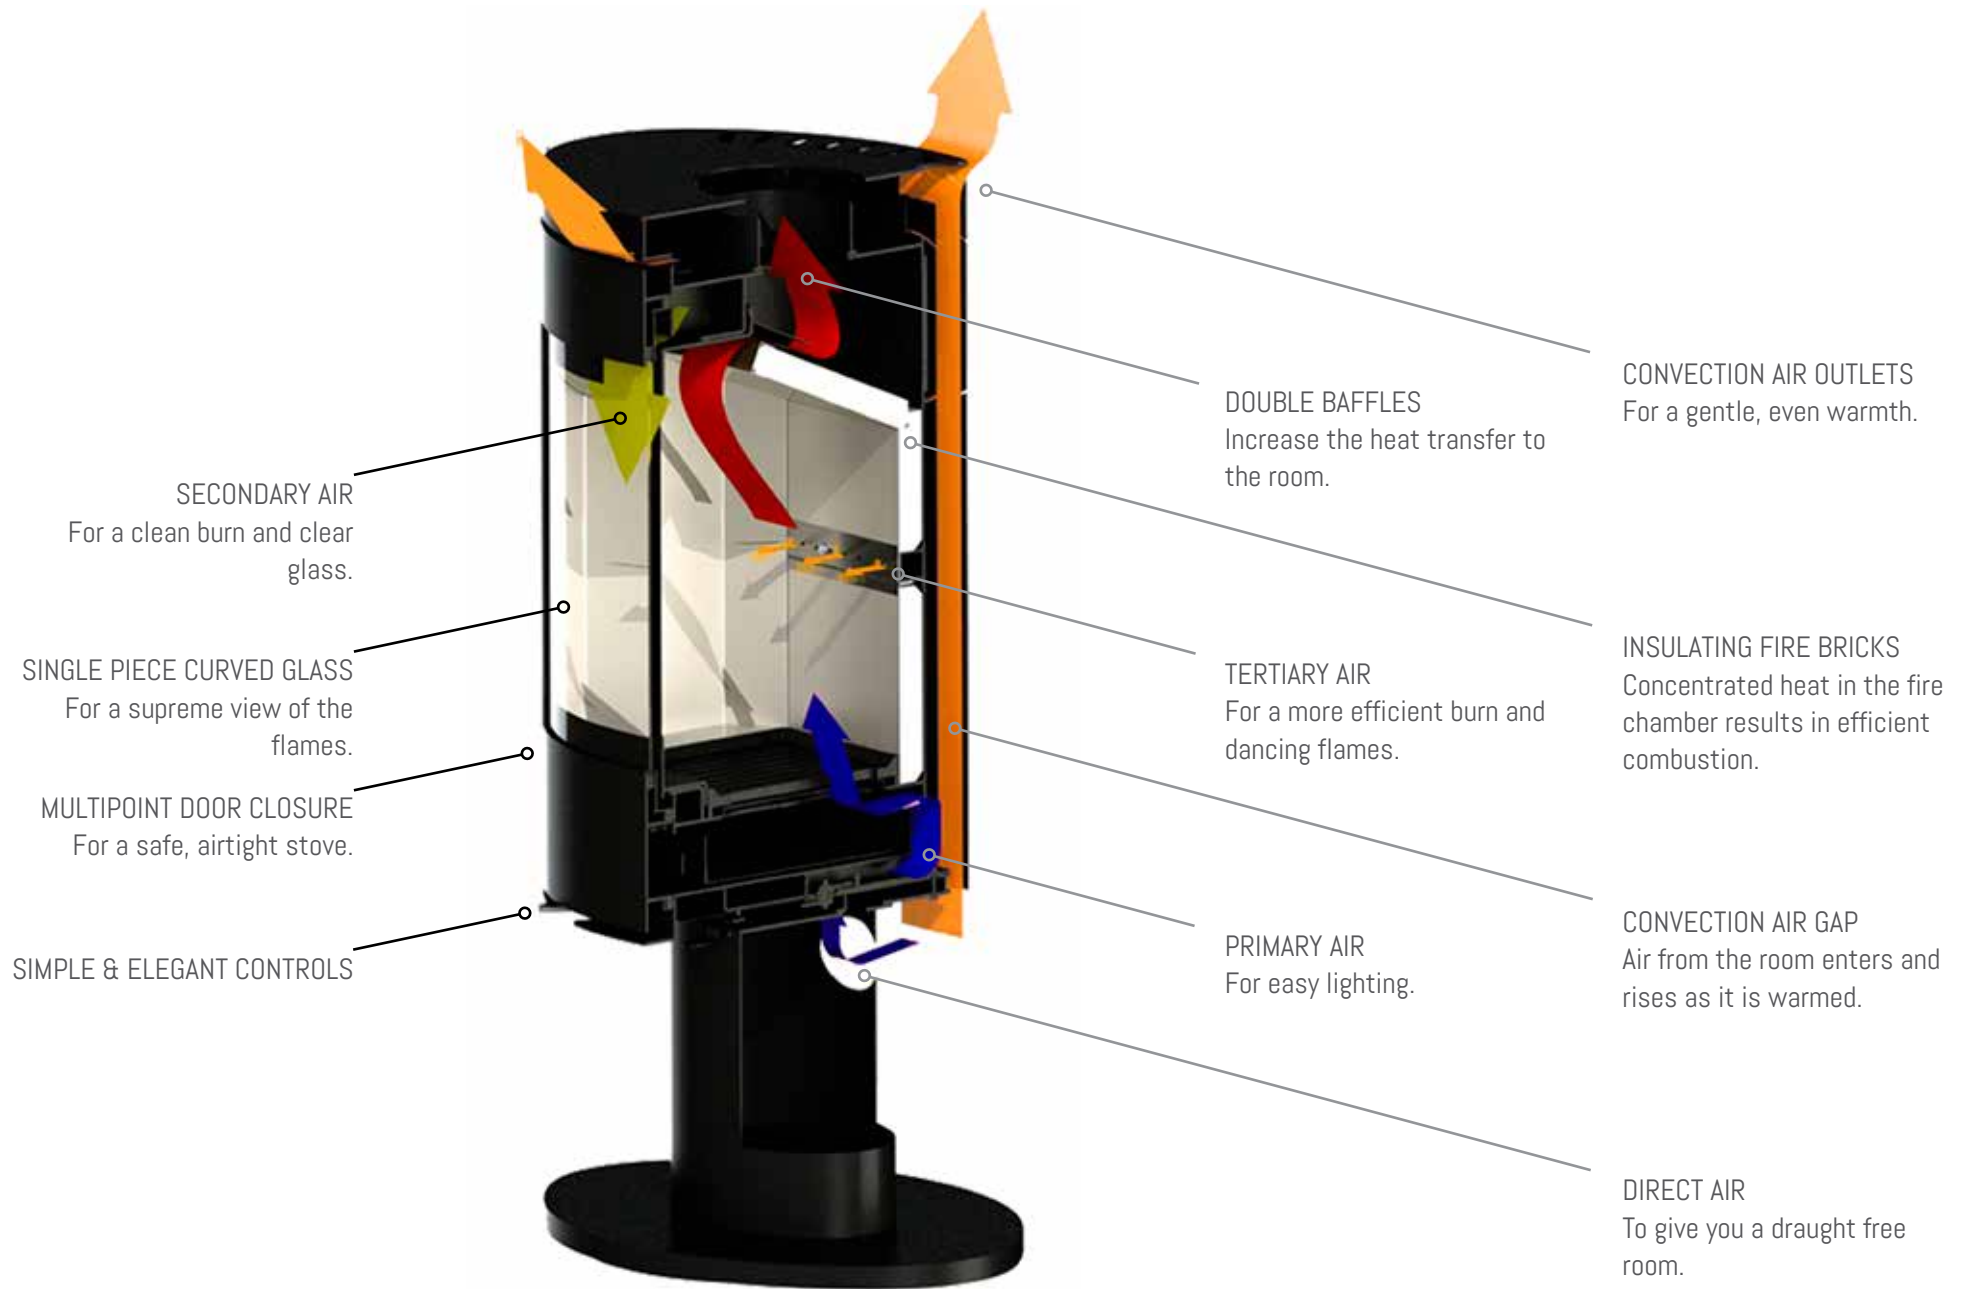


LOW EMISSIONS

We continually innovate to improve our stoves, making them burn cleaner as well as being easier to use.

Our stoves are highly efficient and clean burning, reflected in the fact that SE models have passed the necessary lab tests and may be used to burn wood in Smoke Control Areas. Not only do our SE stoves meet

the strict emissions limits, they are between 60 and 80% cleaner than the standard requires.

SE models are indicated by a green tick.

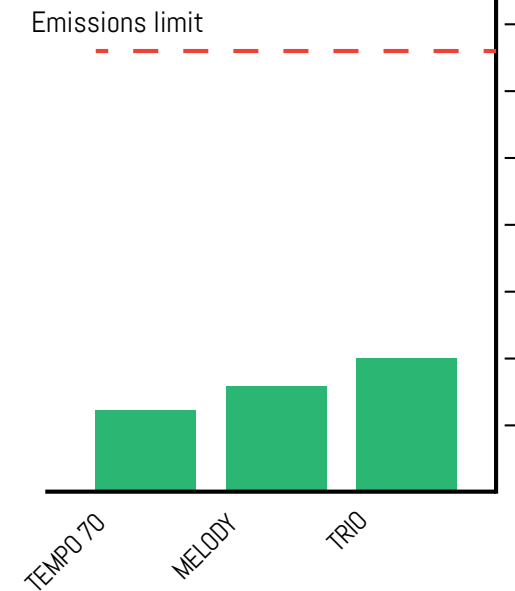



FOR YOUR OPUS STOVE TO WORK AT ITS BEST
WELL SEASONED FIREWOOD IS VITAL
DON'T BURN WATER

DRY FIREWOOD

Wood is renewable, sustainable and low carbon, but for your Opus to work as it should it must also be well seasoned.

Dry, well seasoned firewood is easier to light and burns better, it gives out much more heat, creates much less smoke, and makes less tar in the stove and chimney. That means you save on repeated maintenance tasks like chimney sweeping.

Burning good wood is better for your stove, better for the environment and easier on your pocket.

HOW CAN YOU TELL?

- To be sure, source from a certified Woodsure supplier, see www.woodsurre.co.uk for details.
- Use a moisture meter to test the freshly split face of a log. It should read 25% or below.
- Look: for cracks across the end grain.
- Smell: wet and dry firewood have slightly differently aromas.
- Feel: wet wood is heavier. Remember that some woods are heavier than others, oak compared to ash for example.









A DESIGN CLASSIC AT HOME IN THE
COUNTRY OR CITY



Height.....	1105 mm
Width.....	508 mm
Depth.....	508 mm
Nominal output	5 kW
Efficiency.....	77.4 %
Fuel	Wood
SE model available	✓



MELODY



Our classic 5kW model, the Melody, is a beautiful and highly controllable woodburner. Its elegant clean lines and curved glass make this a classic piece of design.







SIMPLE LINES, CLEAN DESIGN, EASE OF USE
A MARRIAGE OF AESTHETICS AND UTILITY

Height.....	1105 mm
Width.....	508 mm
Depth.....	508 mm
Nominal output	5 kW
Efficiency.....	77.4 %
Fuel	Wood
SE model available	✓



MELODY LS

The Melody LS has the same clean modern look but includes a log store for that evening's fuel.





FULL GLASS DOOR: THE LATEST LOOK ON A CLASSIC STOVE



MELODY GLS

Height.....	1105 mm
Width.....	508 mm
Depth.....	508 mm
Nominal output	5 kW
Efficiency.....	77.4 %
Fuel	Wood
SE model available	✓



MELODY G & MELODY GLS

The single curved glass window extends to the very edge of the door. This results in a gently reflective surface, framed by rich black.

ENTICING GLIMPSES OF FLAME FROM THREE SIDES

Height.....	1145 mm
Width.....	505 mm
Depth.....	505 mm
Nominal output	5 kW
Efficiency.....	77.2 %
Fuel.....	Wood
SE model available	✓



TRIO

Extra glimpses of flame entice and attract. Choose the Trio for a wonderfully wide view of the flames through the three windows.









AN OVAL SHAPE AND WIDE WINDOW COMBINE
FOR A MAGNIFICENT DISPLAY OF FLAMES



Height.....	1089 mm
Width.....	598 mm
Depth.....	437 mm
Nominal output.....	7 kW
Efficiency.....	80 %
Fuel.....	Wood / Smokeless



HARMONY & HARMONY LS

Choose a Harmony to bring
warmth and life to a larger room.
Easy to light, easy to use and
multifuel.





FULL GLASS DOOR FOR A LUSTROUS FINISH
AND TIMELESS STYLE



HARMONY GLS

Height.....1089 mm
Width.....598 mm
Depth.....437 mm
Nominal output.....7 kW
Efficiency.....80 %
Fuel.....Wood / Smokeless



HARMONY G & HARMONY GLS

Perfect for warming the larger room. Classic proportions, a wide window, and the full glass door give that up-to-the-minute look.





OPEN POSSIBILITIES WITH A STOVE
THAT YOU CAN ROTATE

Height.....	957 mm
Width.....	598 mm
Depth.....	437 mm
Nominal output	7 kW
Efficiency.....	80 %
Fuel	Wood / Smokeless

HARMONY PR

Enhance warmth, light and space.
The single pedestal leg gives the
impression of lightness, adding to
the room without imposing.
Let the flames bring you joy and
colour wherever you sit.





SHOWERS & CENTRAL HEATING POWERED BY YOUR OPUS



Height.....	1166 mm
Width.....	565 mm
Depth.....	462 mm
Nominal output	8.3 kW
room water split.....	3.4 kW 4.9 kW
Efficiency.....	83.9 %
Fuel	Wood



CALYPSO

Do it all: enjoy the cosy warmth unique to wood, make hot water for showers, and link up with your central heating system.






OPUS CUBIC


We offer a wide range of display options and combinations, with a core formed by 3 base models; the Tempo 70, 80 and 100.

Simply pick the base model according to the size or the heat output required, and then choose from the configuration options shown opposite. The base model may simply sit directly on the hearth or block of stone or one can choose from a variety of presentation options: log store, pedestal, bench or wall hung. Insets, designed to be built into the wall, are available, as are double sided versions.



Tempo 70
5kW




Tempo 80
8kW



Tempo 100
10kW

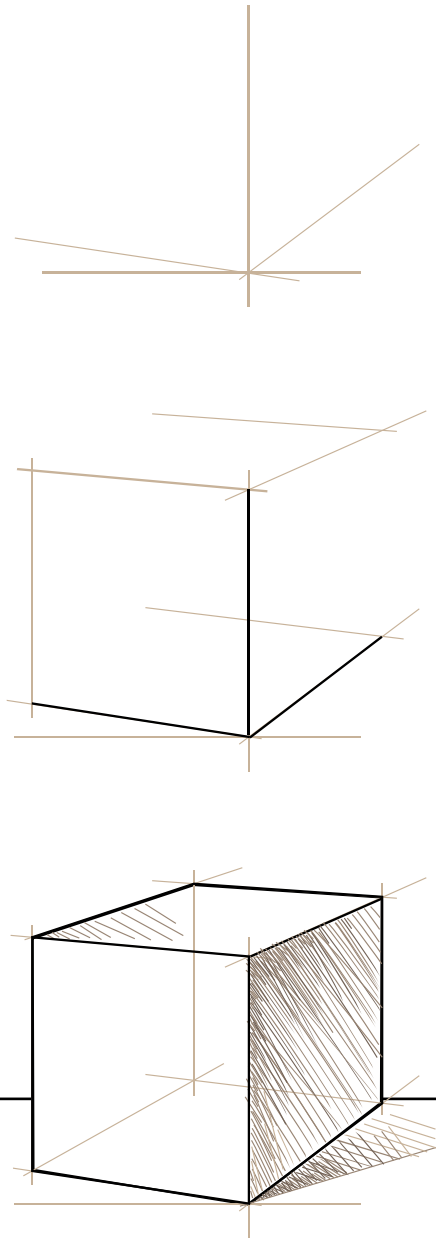

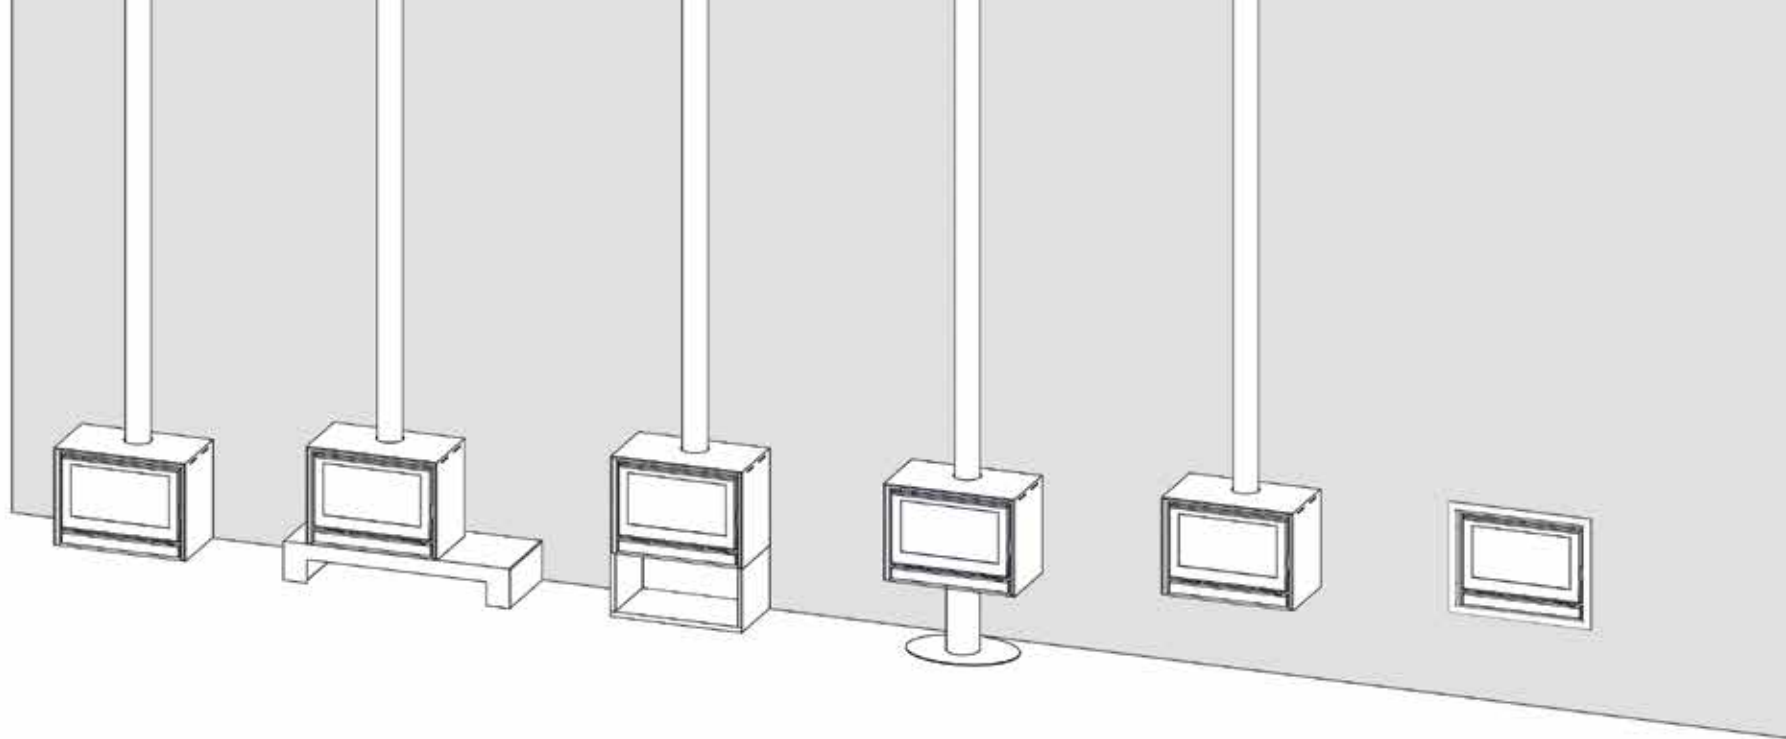

	BASE MODEL	ON BENCH	ON LOG STORE	ON PEDESTAL	WALL HUNG	INSET / BUILT-IN
TEMPO 70	✓	✓	✓	✓	✓	✓
DOUBLE SIDED	-	-	-	-	-	✓
TEMPO 80	✓	✓	✓	✓	✓	✓
DOUBLE SIDED	✓	-	-	✓	-	✓
TEMPO 100	✓	✓	✓	✓	✓	✓
DOUBLE SIDED	✓	-	-	✓	-	✓




1. PREHEATED TERTIARY AIR: for efficient and complete combustion.
2. PREHEATED AIRWASH: to keep the view of the flames clear.
3. DOUBLE BAFFLES: increases efficiency and means more heat goes to the room.
4. SECONDARY AIR CONTROL: once the stove is going well this lever is used to control the burn rate.
5. PRIMARY AIR CONTROL: open this lever to provide a boost of air under the fire for lighting or refuelling. Once the stove is hot this lever would normally be in the closed position.
6. GRATE AND ASHPAN: for easy and convenient cleaning.
7. EXTERNAL AIR INTAKE: by connecting an air duct to the base or back of the stove you reduce draughts in the room, especially applicable to the modern, well sealed, home.

LOW EMISSIONS

Opus Cubic provide optimum combustion, striking flame patterns and exacting levels of control. Pre-warmed supplies of air maintain high temperatures which promotes an efficient burn. Baffling increases the distance travelled by the hot gases which provides more heat to the room.

Advances such as this are part of the reason that the Tempo 70 SE is more than 80% below the particulate emissions threshold set for UK Smoke Control Areas.

A green tick indicates an SE model, permitted for use in Smoke Control Areas.

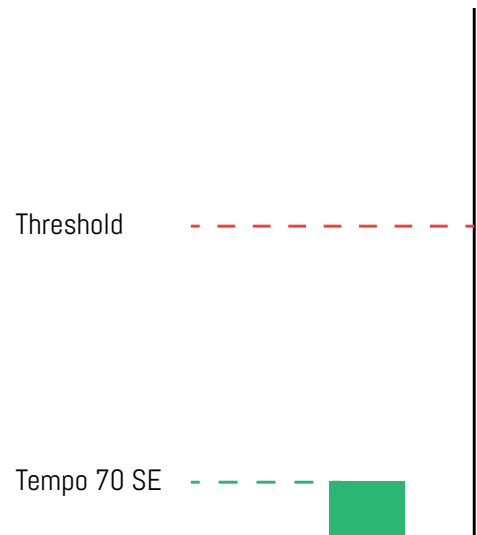



COLLABORATION


Vision, heritage and innovation combine to bring forth Opus Cubic, the proud result of our ongoing project with Carbel to create cutting edge stoves for the homes of today.

EXACT CONTROL

SIMPLE TO USE AND PROVIDING
PRECISE CONTROL OVER
THE HEAT YOU NEED





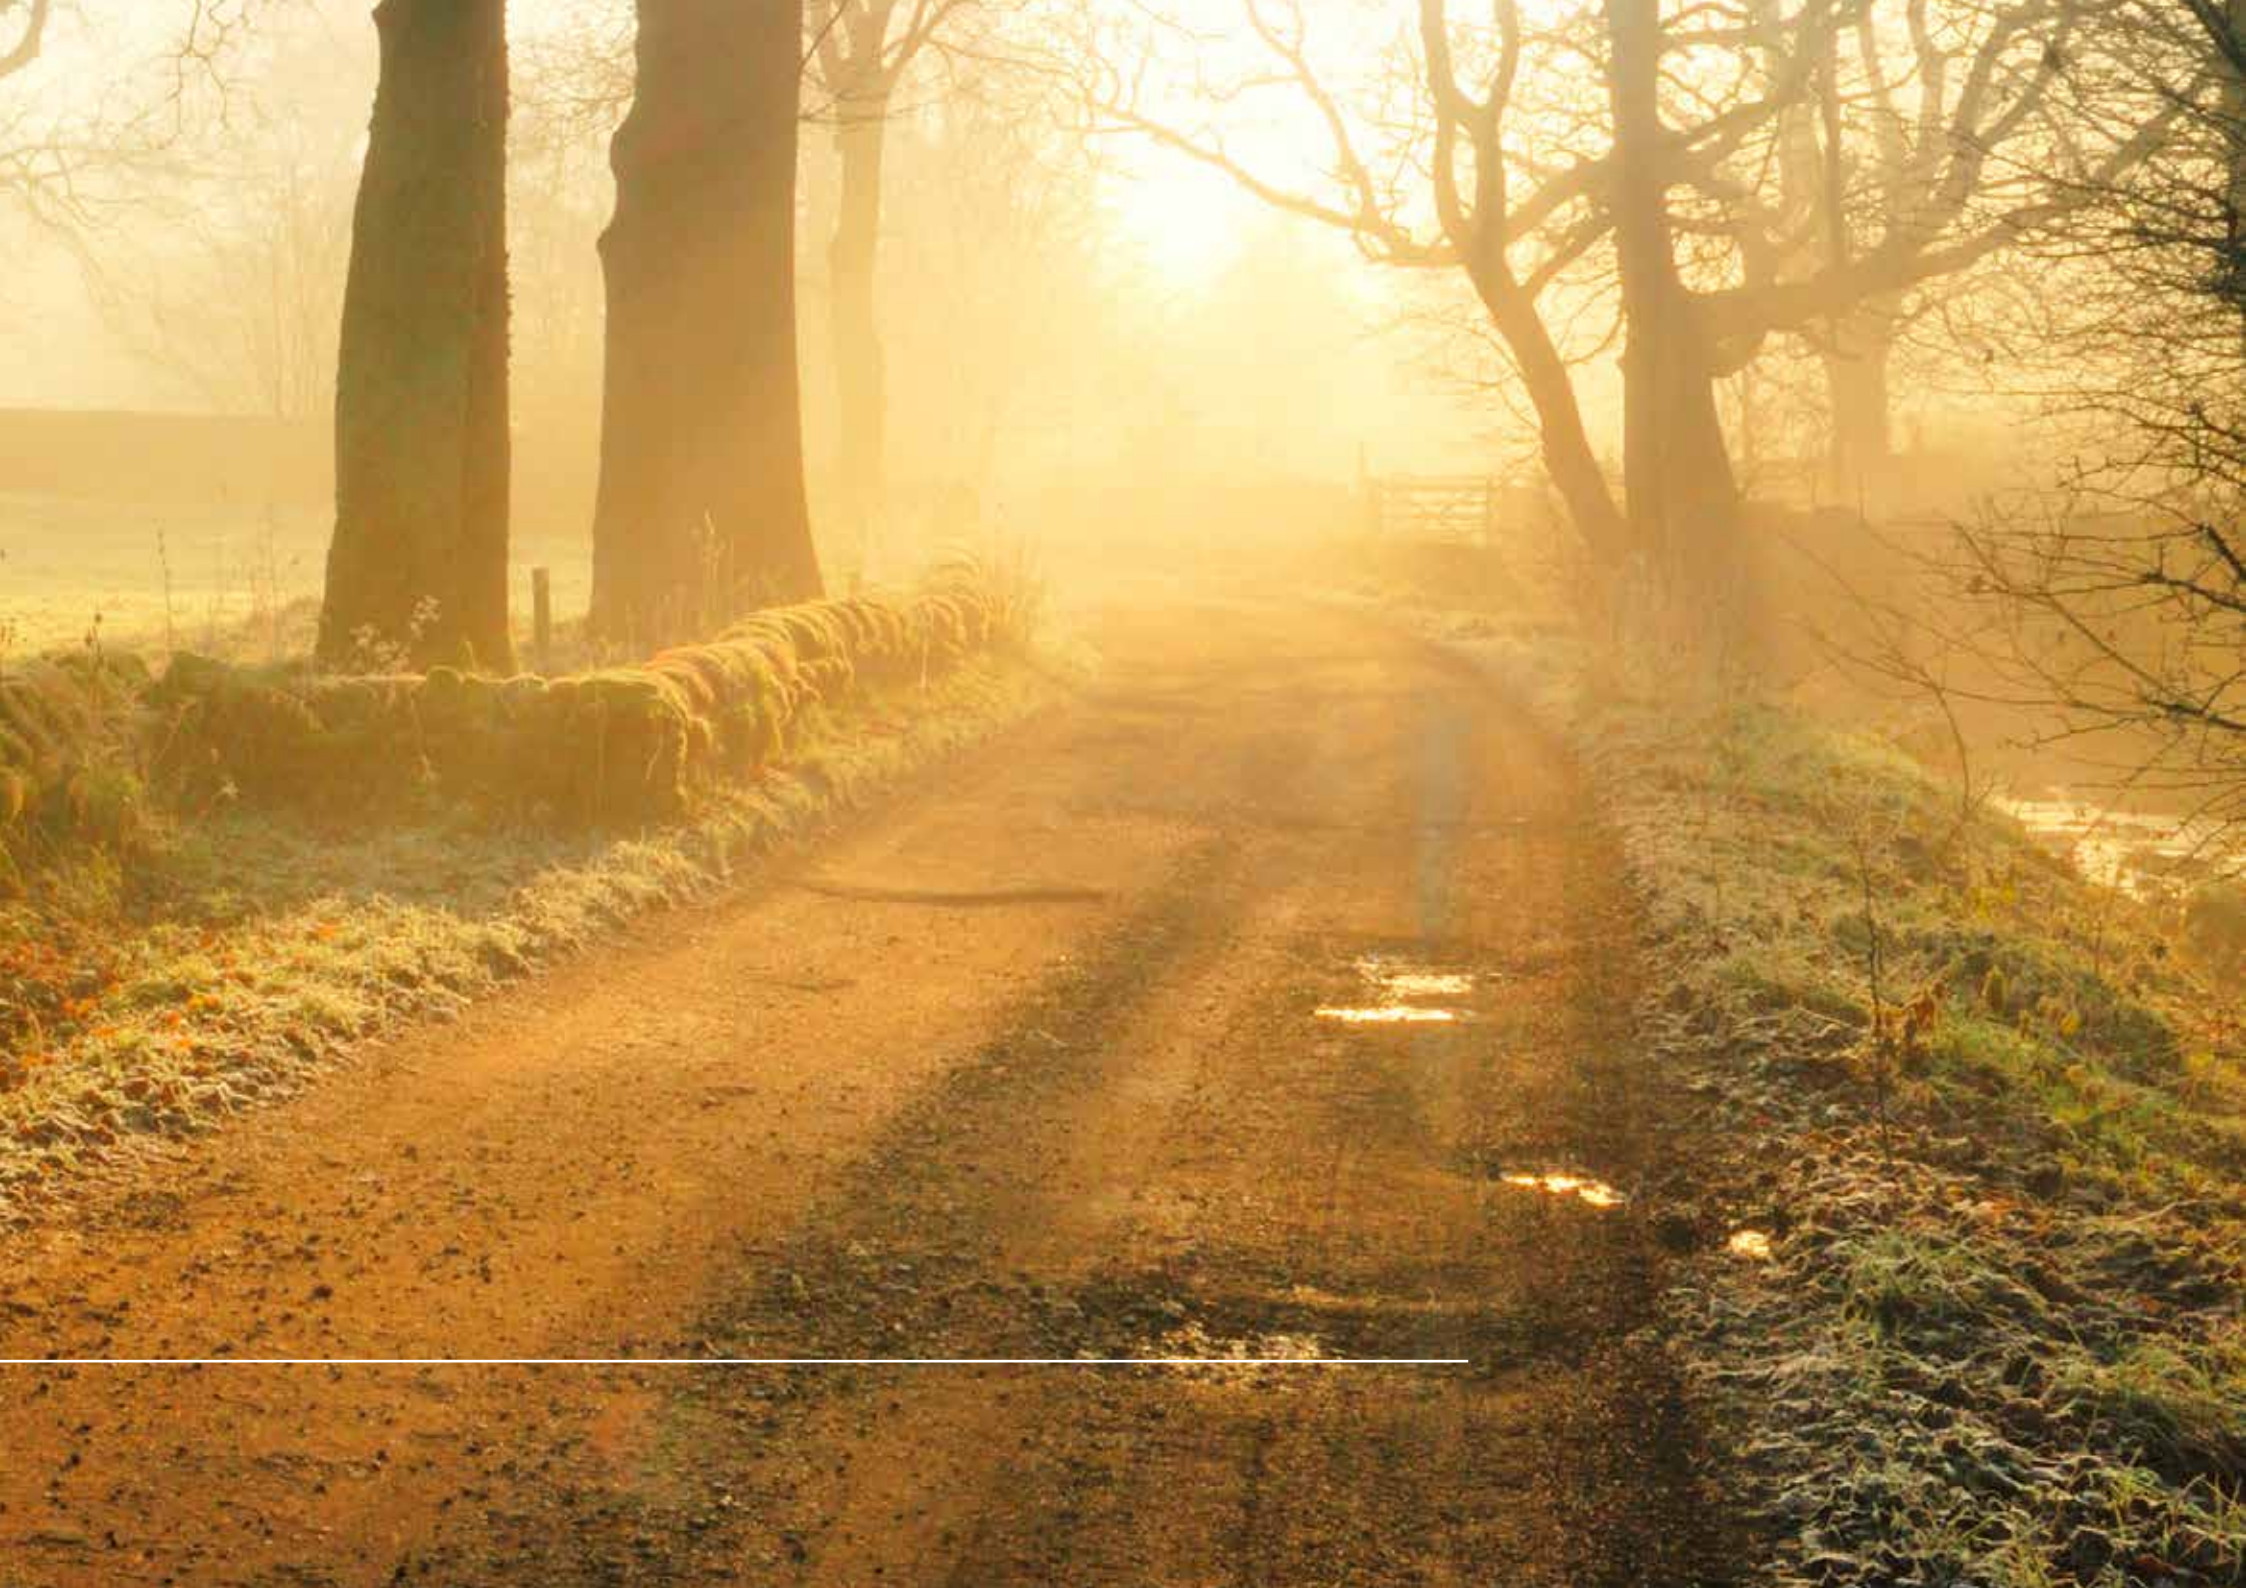

LINEAR, CLEAN AND
A BIG WINDOW

Height.....	575 mm
Width.....	740 mm
Depth.....	420 mm
Nominal output	5 kW
Efficiency.....	76 %
Fuel.....	Wood
SE model available	✓



TEMPO 70


The Tempo 70 has a large window for a 5 kW stove, giving a generous view of the flames. Site it directly on the hearth, hang it on the wall or combine it with a pedestal, log store or bench.







GAIN HEIGHT AND A LIGHT TOUCH
IN YOUR SPACE

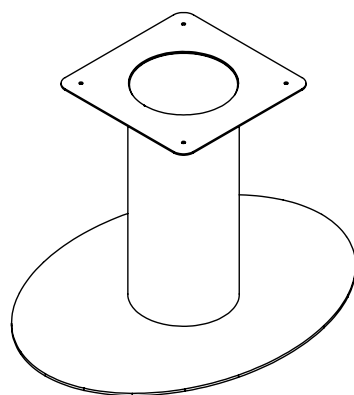

Height on pedestal 1045 mm
Width 740 mm
Depth 420 mm
Nominal output 5 kW
Efficiency 76 %
Fuel Wood

SE model available ✓



TEMPO 70 + PEDESTAL

Raised up 470mm on a pedestal the Tempo 70 gains height, making re-fuelling easy, and, with the flue pipe, giving the impression of a single column rising up through the stove.



LOW, ELONGATED, ELEGANT



TEMPO 70 + BENCH. BENCH DIMENSIONS H,W,D: 250MM, 1440MM, 550MM





STUNNING FLAMES ON A LOG STORE OR FLOATING ABOVE THE FLOOR

Height on log store.....	975 mm
Height on wall	up to you
Width.....	740 mm
Depth.....	420 mm
Nominal output	5 kW
Efficiency.....	76 %
Fuel.....	Wood

SE model available



TEMPO 70 WALL HUNG







FREE-STANDING WITH SIMPLE LINES



Height..... 855 mm
Width..... 730 mm
Depth..... 420 mm
Nominal output 5 kW
Efficiency..... 76 %
Fuel Wood
SE model available ✓



TEMPO 70 F

The Tempo 70 F is a free-standing stove with sides that extend smoothly down to form the legs.



OPUS

BUILT-IN WINDOW OF FIRE

Height.....	555 mm
Width.....	695 mm
Depth.....	425 mm
Nominal output	5 kW
Efficiency.....	76 %
Fuel	Wood
SE model available	✓



TEMPO 70i

Designed to be built into a wall or enclosure, the Tempo 70i helps to save on space in the home and provides a window of fire. The Tempo 70i is shown here with a narrow frame.

CREATING DISTINCTIVE SEPARATION AND FLOW
IN LARGER SPACES

Height on pedestal.....	1090 mm
Width.....	830 mm
Depth.....	575 mm
Output.....	14 kW
Efficiency.....	79 %
Fuel.....	Wood



TEMPO 80 DOUBLE SIDED + PEDESTAL

A stunning display of warming
flame, ideal for the larger room.










COMPLIMENTARY STRAIGHT LINES

Height on bench.....	870 mm
Width.....	830 mm
Depth.....	470 mm
Nominal output.....	8 kW
Efficiency.....	79 %
Fuel.....	Wood

TEMPO 80 + BENCH

Combined with a Bench the width of the Tempo 80 is enhanced and the whole stove elegantly raised.



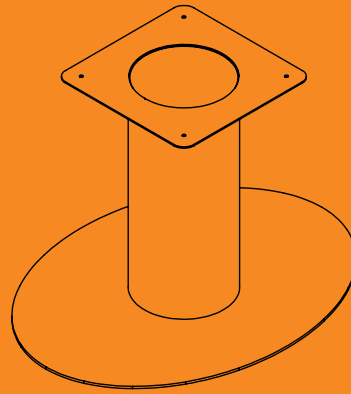

WARMTH AND CONTROL

Height on pedestal	1090 mm
Width	830 mm
Depth	470 mm
Nominal output	8 kW
Efficiency	79 %
Fuel	Wood

TEMPO 80 + PEDESTAL

The Tempo 80 is our mid-sized 8kW woodburner, and can be burnt efficiently at lower and higher outputs, making it suited to a wide range of room sizes.

ENJOY NATURAL WARMTH
IN TWO SPACES

Height.....	620 mm
Width.....	830 mm
Depth.....	575 mm
Output.....	14 kW
Efficiency.....	79 %
Fuel.....	Wood




TEMPO 80 DOUBLE SIDED

Double sided stoves provide a stunning feature, allowing you to enjoy warmth in both rooms.







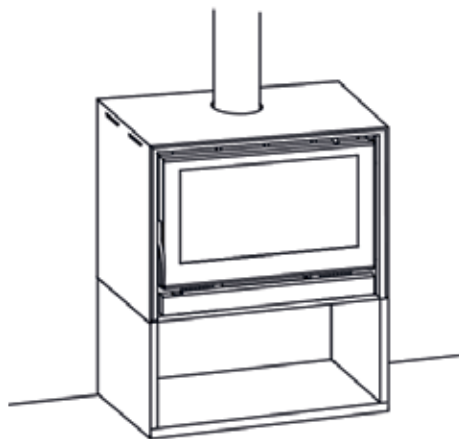

Height on log store.....	1020 mm
Width.....	830 mm
Depth.....	470 mm
Nominal output.....	8 kW
Efficiency.....	79 %
Fuel.....	Wood

TEMPO 80 + LOG STORE

Combined with a log store the Tempo 80 is not only raised up by 400mm, but one also gains a handy space to store the evening's logs.



STUNNING FULL LETTERBOX OF ROLLING FLAMES

Height on log store.....	1020 mm
Width.....	1030 mm
Depth.....	470 mm
Nominal output.....	9 kW
Efficiency.....	78 %
Fuel.....	Wood



TEMPO 100 + LOG STORE

The largest Opus Cubic, the 9.3 kW Tempo 100 is a wide landscape stove, easily capable of running at a sedate 6kW or a roaring 15kW. Pictured here combined with a log store.





A WINDOW OF FIRE THAT IS PART
OF YOUR HOME

Height.....	595 mm
Width.....	985 mm
Depth.....	475 mm
Nominal output.....	9 kW
Efficiency.....	78 %
Fuel.....	Wood



TEMPO 100i

The Tempo 100i is an inset stove, designed to be built into the fabric of your home. Shown here with a wide frame.

GLIMPSES OF DEPTH BEYOND THE
FLAMES INVITES ATTENTION

Height.....	595 mm
Width.....	1005 mm
Depth.....	550 mm
Output	15.3 kW
Efficiency.....	79 %
Fuel.....	Wood



TEMPO 100i DS

A double sided inset stove can be enjoyed from two rooms at once. The subtle glimpse through to the other room adds dynamic space. Shown here with the narrow frame.







CYLINDRIC - TECH SPEC



MELODY



MELODY LS



MELODY G



MELODY GLS



TRIO

HEIGHT (mm)	1105	1105	1105	1105	1145
WIDTH (mm)	508	508	508	508	505
DEPTH (mm)	508	508	508	508	505
NOMINAL HEAT OUTPUT (kW) room water split	5 -	5 -	5 -	5 -	5 -
EFFICIENCY (%)	77.4	77.4	77.4	77.4	77.2
FLUE SIZE (mm)	150	150	150	150	150
FLUE OUTLET POSITION	Top or rear	Top or rear	Top or rear	Top or rear	Top or rear
HEIGHT TO CENTRE OF REAR FLUE	955	955	955	955	985
SMOKE CONTROL EXEMPT MODEL AVAILABLE	✓	✓	✓	✓	✓
ECODESIGN READY	✓	✓	✓	✓	✓
AIRWASH	✓	✓	✓	✓	✓
FUEL	Wood	Wood	Wood	Wood	Wood
DISTANCE TO COMBUSTIBLES REAR (mm)	150	150	150	150	120
DISTANCE TO COMBUSTIBLES SIDES (mm)	150	150	150	150	640
MAXIMUM LOG LENGTH (mm)	330	330	330	330	330



HARMONY



HARMONY LS



HARMONY G



HARMONY GLS



HARMONY PR



CALYPSO

1089	1089	1089	1089	957	1166
598	598	598	598	598	565
437	437	437	437	437	462
7	7	7	7	7	8.3
-	-	-	-	-	3.4 kW 4.9 kW
80.0	80.0	80.0	80.0	80.0	83.9
150	150	150	150	150	150
Top or rear	Top or rear	Top or rear	Top or rear	Top or rear	Top only
926	926	926	926	946	-
-	-	-	-	-	-
✓	✓	✓	✓	-	✓
✓	✓	✓	✓	✓	✓
Multifuel	Multifuel	Multifuel	Multifuel	Multifuel	Wood
200	200	200	200	200	100
200	200	200	200	200	100
330	330	330	330	330	330

CUBIC - TECH SPEC



TEMPO 70



TEMPO 70 F



TEMPO 70i



TEMPO 70i DS



TEMPO 80

HEIGHT (mm)	575	855	555	555	620
HEIGHT ON LOG STORE	975	-	-	-	1020
HEIGHT ON PEDESTAL	1045	-	-	-	1090
WIDTH (mm)	740	730	695	695	830
DEPTH (mm)	420	420	425	550	470
NOMINAL HEAT OUTPUT (kW)	5	5	5	12.7	8
EFFICIENCY (%)	76	76	76	82	79
FLUE SIZE (mm)	150	150	150	200	150
SMOKE CONTROL EXEMPT MODEL AVAILABLE	✓	✓	✓	-	-
ECODESIGN READY	✓	✓	✓	✓	-
AIRWASH	✓	✓	✓	✓	✓
FUEL	Wood	Wood	Wood	Wood	Wood
DISTANCE TO COMBUSTIBLES REAR (mm)	200	200	200	-	200
DISTANCE TO COMBUSTIBLES SIDES (mm)	500	500	500	500	500
MAXIMUM LOG LENGTH (mm)	450	450	450	450	550



TEMPO 80 DS



TEMPO 80i



TEMPO 80i DS



TEMPO 100



TEMPO 100 DS



TEMPO 100i




TEMPO 100i DS

620	595	595	620	620	595	595
-	-	-	1020	-	-	-
1090	-	-	1090	1090	-	-
830	780	805	1030	1030	985	1005
575	475	550	470	575	475	550
14	8	14	9	15.3	9	15.3
79	79	79	78	79	78	79
200	150	200	200	200	200	200
-	-	-	-	-	-	-
✓	-	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓
Wood	Wood	Wood	Wood	Wood	Wood	Wood
-	200	-	200	-	200	-
500	500	500	500	500	500	500
550	550	550	650	650	650	650

FRAMES

A choice of wide 90mm (see p.66), or narrow 45mm (see p.52 & p.68) frames makes it easy to neatly finish an inset stove installation.

The frame is fitted at the end of the installation, covering the expansion gap between the stove and the wall and providing a neat, clean finish.

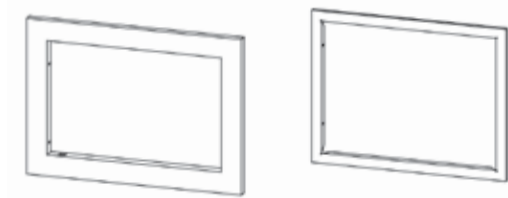

THERMALUX

Thermalux makes installation of inset stoves fast and easy. Thermalux comes in 50mm thick sheets, is insulating and heat resistant to over 1000°C.

EASY TO WORK WITH: Thermalux can be worked and cut with normal woodworking tools and then glued and screwed together to quickly form walls, enclosures and pods for inset stoves, without the need for an underlying framework.

FANTASTIC FINISH: Primer is applied to the finished structure and it can then simply be plastered like any other wall in the home.

QUICK: Because it is so easy to work with, creating the structure for your installation is simple, helping you to achieve a fabulous result in a short time.



LOG BOX


Our log boxes provide a handy store of firewood near your stove, allowing you to incorporate the stunning natural texture of firewood into your overall design.

The two sizes of log box can be installed vertically or horizontally. A larger feature wall installation can incorporate more than one box for added impact. A dedicated kindling store can be a very useful touch.



FRAME SPEC


Suitable for all our inset models, including double sided versions.

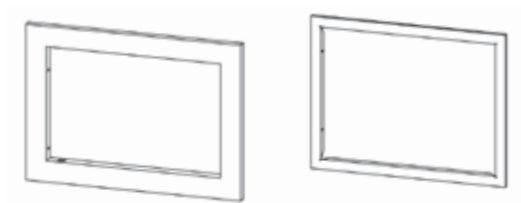

	WIDE 90mm FRAME		NARROW 45mm FRAME	
	WIDTH (mm)	HEIGHT (mm)	WIDTH (mm)	HEIGHT (mm)
TEMPO 70i (inc. double sided)	860	645	765	625
TEMPO 80i (inc. double sided)	950	685	855	665
TEMPO 100i (inc. double sided)	1150	685	1055	665


BENCH

Suitable for all but the Tempo F, double sided, and inset models. Simple, elegant and striking.

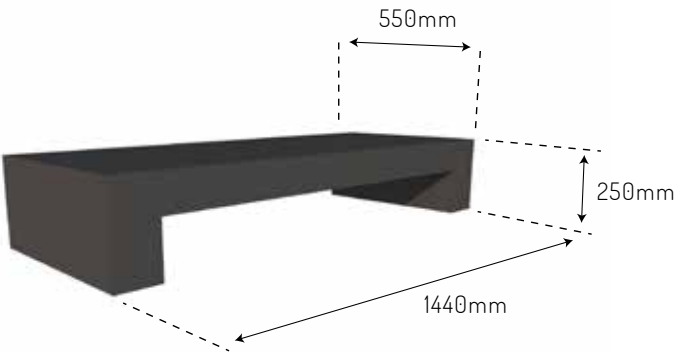

LOG BOX SPEC

Our log boxes are made from steel, finished in matt black and have a 15mm lip for easy and neat installation.

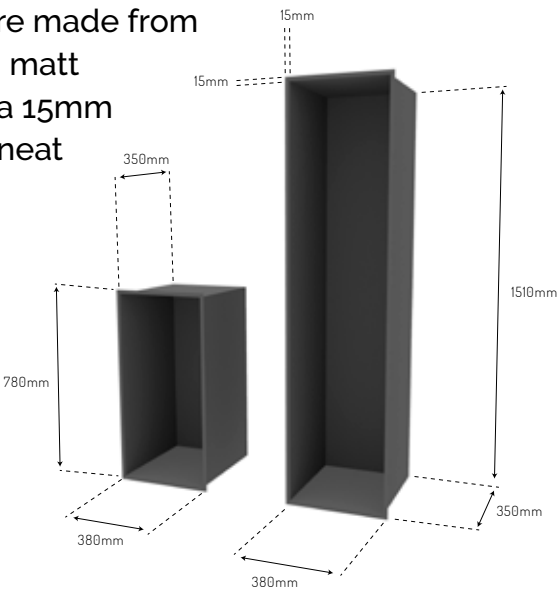



QUALITY BACKED BY
5 YEAR WARRANTY

WARRANTY

The reassurance of a 5 year warranty
which covers all our stoves.

Consumables, like glass, firebricks and rope seals
are excluded. Full details of the warranty can be found in the manual.
Your statutory rights are not affected.









LIFESTYLE, LIFECHOICE

Wood heating is one of life's simple and elemental pleasures.

Of course an Opus will do the practical work of warming your home, but much more than that it is an antidote to our busy modern world. Handling your wood gives a real understanding of its quality and the energy it represents, operating your Opus puts you in direct control of the heat. Your Opus acts as a place to gather: the flames are enticing, calming and naturally draw us in.

Being by your stove offers a chance (or welcome excuse) to reconnect with others and yourself, to ground, to rediscover, to simply be.





www.opusstoves.co.uk



Opus-2017-002